

# DECIMATOR VERSION 2.0



The latest USB Control Software and Specifications for this product can be downloaded from:  
[www.decimator.com/specs](http://www.decimator.com/specs)

## STATUS


LED	Description	LED Status			
		Off	Green	Red	Orange
1	Power	None	Good	Updating	
2	Format Detected	None	SD	HD	3G

## DIP SWITCHES

SWITCH		OFF	ON
1	Down-converted Output	NTSC	PAL
2	NTSC Pedestal	OFF	ON
3	Down-converted Output Aspect Type	Letterbox for 16:9 Full Screen for 4:3	CROP to 4:3
4	Down-converted Output Aspect	16:9	4:3

SW 5	SW 6	SW 7	Group	Pair
Off	Off	Off	1	1
Off	Off	On	1	2
Off	On	Off	2	1
Off	On	On	2	2
On	Off	Off	3	1
On	Off	On	3	2
On	On	Off	4	1
On	On	On	4	2

SW 8	SW 9	SW 10	HDMI Output
Off	Off	Off	DVI RGB 4:4:4, No audio is passed
Off	Off	On	HDMI RGB 4:4:4, 2 Audio channels passed
Off	On	Off	HDMI YCbCr 4:4:4, 2 Audio channels passed
Off	On	On	HDMI YCbCr 4:2:2, 2 Audio channels passed
On	Off	Off	HDMI RGB 4:4:4, 8 Audio channels passed
On	Off	On	HDMI YCbCr 4:4:4, 8 Audio channels passed
On	On	Off	HDMI YCbCr 4:2:2, 8 Audio channels passed
On	On	On	DVI RGB 4:4:4, No audio is passed

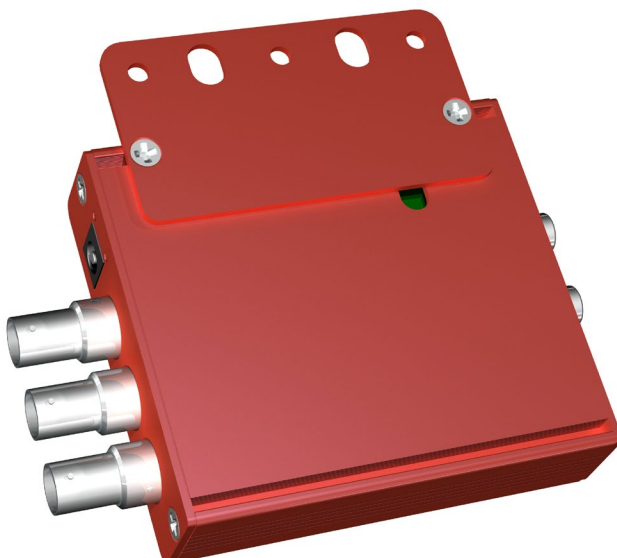

## MOUNTING BRACKET

The Red Metal Mounting Bracket is included to assist you in mounting the DECIMATOR 2 unit to the back of racks and monitors.

## DIRECTIONS

Line up the holes on the Mounting Plate with the threaded slots found on the back, top and bottom, of the DECIMATOR 2 unit. Attach the Mounting Plate as shown below.

# SERVICE WARRANTY

Decimator Design warrants that this product will be free from defects in materials and workmanship for a period of 36 months from the date of purchase. If this product proves to be defective within this warranty period, Decimator Design, at its discretion, will either repair the defective product without charge for parts and labour, or will provide a replacement product in exchange for the defective product.

In order to service under this warranty, you the Customer, must notify Decimator Design of the defect before the expiration of the warranty period and make suitable arrangements for the performance of service. The Customer shall be responsible for packaging and shipping the defective product to a designated service centre nominated by Decimator Design, with shipping charges prepaid. Decimator Design shall pay for the return of the product to the Customer if the shipment is to a location within the country in which the Decimator Design service centre is located. The Customer shall be responsible for paying all shipping charges, insurance, duties, taxes, and any other charges for products returned to any other location.

This warranty shall not apply to any defect, failure or damage caused by improper use or improper or inadequate maintenance and care. Decimator Design shall not be obligated to furnish service under this warranty a) to repair damage resulting from attempts by personnel other than Decimator Design representatives to install, repair or service the product, b) to repair damage resulting from improper use or connection to incompatible equipment, c) to repair any damage or malfunction caused by the use of non-Decimator Design parts or supplies, or d) to service a product that has been modified or integrated with other products when the effect of such a modification or integration increases the time of difficulty of servicing the product.



Copyright © 2013-2023  
Decimator Design Pty Ltd, Sydney Australia  
[www.decimator.com](http://www.decimator.com)